Access panel with fixed hinges F1 System - Access panel with or without plasterboard inlay

Product description:

The access panel consists of aluminium profiles, without or with plasterboard inlay (GKBI) 12.5 mm, 15 mm or 25 mm and two snap locks.

The two frames of the access panel each consist of four individual frame parts that are firmly joined together by a special welding process. From size 300 x 300 mm, the access panel is equipped with a latch. To avoid possible accidents, this must be rehung after each opening of the door leaf. The use of the access panel in the wall as well as in the ceiling area (not accessible) is possible without any problems.

There is an air gap of 1.5 mm between the frame and the door leaf. The concealed snap locks open the access panel when pressed.





Standard sizes for plasterboard inlay 12.5 mm:

F1 System	Dimensions in mm				
	Α	В	С	D	E
200200G125	200	200	13	24	40
300300G125	300	300	13	24	40
400400G125	400	400	13	24	40
500500G125	500	500	13	24	40
600600G125	600	600	13	24	40

All standard sizes are available for planking thicknesses of 12.5 mm, 15 mm and 25 mm. Please enquire about other planking thicknesses!

Locks:

The access panel can be designed with the following lock types:

FS Ζ ΡZ SD Η

Square lock with white rosette

Round cylinder lever lock with key

Profile cylinder lock with metal rosette

Screwdriver lock




- Hexagon socket lock
- Hexagon socket lock with safety pin

Of course, the screwed version or only the aluminium frame is also available!





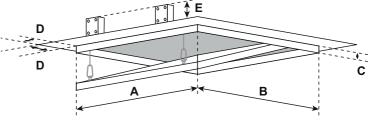

Special designs:

Special dimensions in any desired size can be manufactured on request.

Special advantages of our system

- Technically mature solution
- Flush installation in plasterboard ceilings and walls
- Can also be used for plasterboard perforated panels
- Better protection against damage or loss, as the door leaf is firmly connected to the outer frame







FF Systems