Access panel for unhinging with plasterboard perforated panel

F2 System - Access panel with plasterboard perforated plate for plasterboard ceilings



Product description:

The access panel consists of aluminium profiles with 10 mm, 12.5 mm or 15 mm plasterboard perforated plate inlays and two snap locks.

The two frames of the access panel each consist of four individual frame parts that are firmly joined together by a special welding process. From size 300 x 300 mm, the access panel is equipped with a latch. To avoid possible accidents, this must be re-hung after each opening of the door leaf.


There is an air gap of 0.5 mm between the frame and the door leaf. The concealed snap locks open the access panel when pressed.

The door leaf can be unhinged


All currently common perforations can be used. More than 30 different perforations in stock!









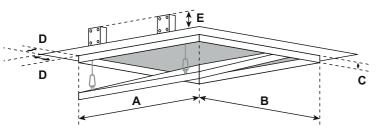

Example with 12.5 mm perforated plasterboard plate

A+B: Depending on type of hole. Is adapted to the existing hole pattern with millimetre precision.

C: 13 mm

D: 24 mm to 28 mm

E: 40 mm

Special designs:

Special dimensions in any desired size can be manufactured on request.

Special advantages of our system

- Inexpensive solution
- Short-term delivery possible
- Quick, trouble-free installation (including retrofitting)
- Sturdy aluminium frame
- Technically mature solution
- Flush installation in perforated plasterboard ceiling:
- Fits exactly to the existing hole pattern
- No more time-consuming fitting on the construction site required

Locks:

The access panel can be designed with the following lock types:

FS Square lock with white rosette

Z Round cylinder lever lock with key

PZ Profile cylinder lock with metal rosette

SD Screwdriver lock

H Hexagon socket lock

P Hexagon socket lock with safety pin

