

Access panel, round, for unhinging

R System - Round access panel with plasterboard inlay, for unhinging

Product description:

The round access panel consists of aluminium profiles with 12.5 mm plasterboard inlay (GKBI) and snap locks.

The access panel is equipped with a latch. To avoid possible accidents, this must be re-hung after each opening of the door leaf. The use of the access panel in the wall as well as in the ceiling area (not accessible) is possible without any problems. There is an air gap of 1.5 mm between the frame and the door leaf, which is provided with a circumferential seal. The concealed snap locks open the access panel when pressed.

NEW!

Now also available with perforated plasterboard!




Acoustic perforated panel



Standard sizes for plasterboard inlay 12.5 mm:

R System	Dimensions in mm		
	A	B	C
R200G125	200	260	13
R300G125	300	360	13
R400G125	400	460	13
R500G125	500	560	13
R600G125	600	660	13


All standard sizes are available for planking thicknesses of 12.5 mm and 15 mm.

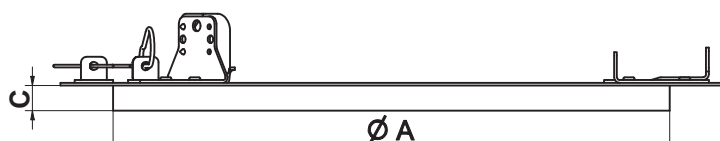

Locks:

The access panel can be designed with the following lock types:

- FS** Square lock with white rosette
- Z** Round cylinder lever lock with key
- PZ** Profile cylinder lock with metal rosette

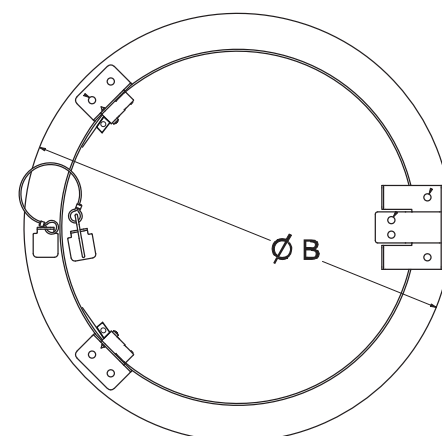

Special advantages of our system

- Inexpensive solution
- Short-term delivery possible
- Quick, trouble-free installation
- Sturdy aluminium frame
- Mature technology
- Flush installation in plasterboard ceilings and walls
- Can also be used for plasterboard perforated panels