

Access panel for facade "watertight"


System MPWD - for plastering

Description

The access panel consists of aluminium profiles, a cement board and a round cylinder lock with key. Both, an outer and an inner frame of the access panel consist of four single frames, which are firmly connected due to a special welding process. The access panel is equipped with a safety-system against accidental opening.

In order to avoid accidents, this safety-system has to be secured after each opening. A joint gap of 3 mm is visible between outer frame and door leaf, which is equipped with an innovative brush joint and, in addition, with a special joint. Access panels for facades in the outer area are applicable for direct mounting onto solid walls (without external wall insulation system) or for installation into a wall insulation system (foam-sealed) from an insulation thickness of 80 mm.

NEW



Standard sizes

System MPWD	Dimensions in mm		
	A	B	C
MPWD200200	200	200	78
MPWD300300	300	300	78
MPWD400400	400	400	78
MPWD500500	500	500	78
MPWD600600	600	600	78

All standard sizes are available at short notice from stock.

The access panel is "watertight".


Customized solutions

Customized sizes can be produced in every dimension upon enquiry.

Locks

The access panel can be equipped with the following types of locks:

- Z** Round-cylinder lock with key (standard)
- SD1** Screwdriver operated cam latch
- H1** Hex Head Cam Latch
- P1** Pinned Hex Head Cam Latch

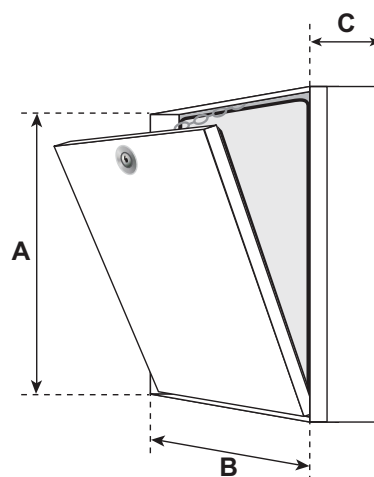

Particular advantages of our system

- Economical solution
- Fast delivery
- Quick and easy installation
- Solid aluminium frame
- Superior engineering & innovative design
- Flush installation in facade walls

FF Systembau
Access Panels