


Typical floor finishes

For junctions of flexible sheeting, e.g. vinyl or linoleum and hard paving, e.g. ceramic tiling etc.

Performance

Visedge VR is designed to anchor securely the perimeter of the vinyl sheeting to prevent the ingress of water and to protect the edge profile of the adjoining ceramic tile paving.

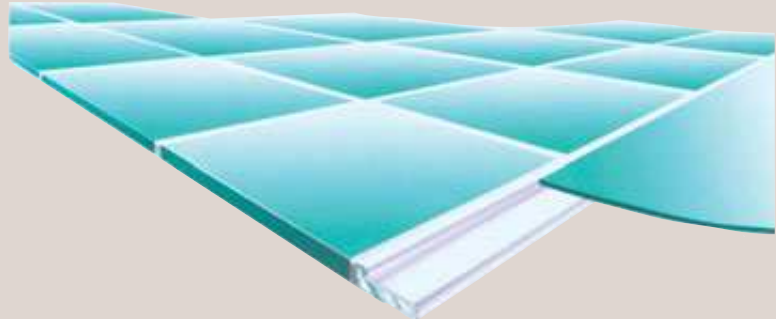

Flexible floor finishes




For limited depth applications



Pedestrian traffic

Section at paving junction (scale 1:2)

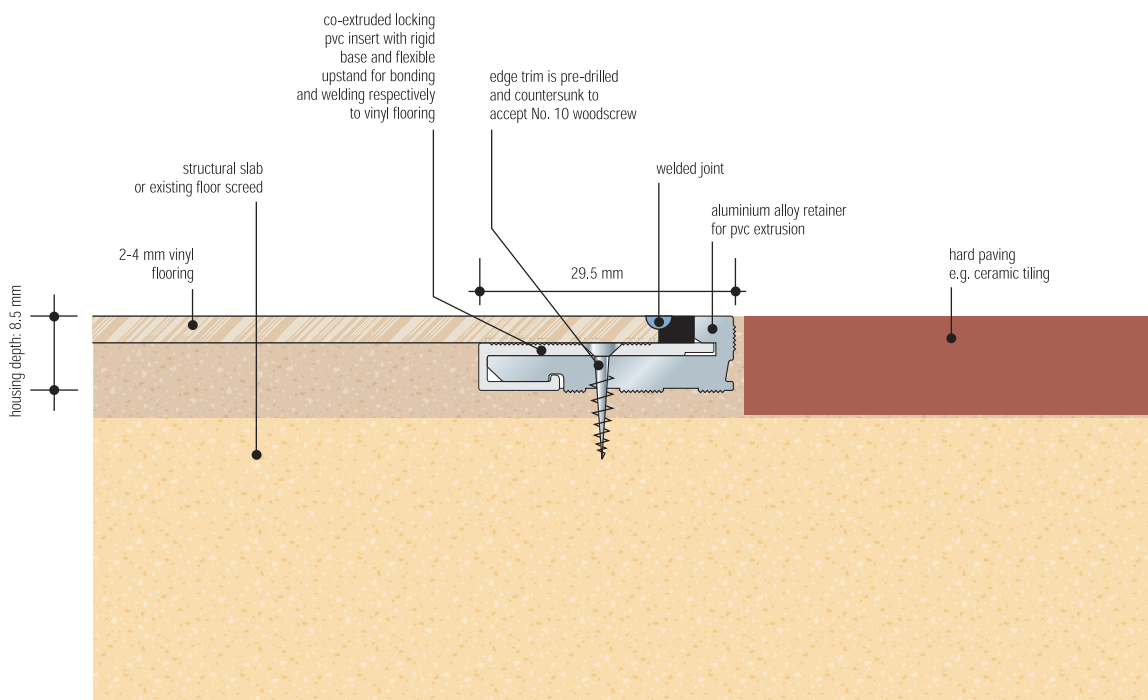

Typical specification clause

Vinyl edge securing trim shall be Howe Green Ltd Visedge VR with weldable pvc securing edge. Total quantity = ...† No. 2.0 metre lengths. All to be manufactured and supplied by Howe Green Ltd, Marsh Lane, Ware, Hertfordshire, SG12 9QQ, Great Britain, and installed in accordance with the manufacturer's installation details and sitework guide.

† Insert appropriate numbers & quantities

Size

Visedge VR is stocked in packs of 5 No. 2.0 metre lengths. Any quantity of 2.0 metre lengths can be supplied.

See installation guide on page 35.